


92mm-Series Fan



- Material--Frame:Plastics (Flammability:UL94V-0)
Impeller:Plastics (Flammability:UL94V-0)
- Lead Wire-- +Red -Black
Optional Function:Brown(Sensor) Yellow(Control)
- Life Time-- 25000 Hours Sleeve bearing
50000 Hours Ball bearing
- Storage Temperature-- -30°C~+70°C (Non-condensing)
- Bearing Type-- Ball Bearings~Sleeve
- Speed Range-- ±10%

Model No.	Rated Voltage	Operating Voltage	Rated Current	Rated Input	Speed	Maximum Air Flow		Max.Static Pressure		Noise
	VDC	VDC	AMP	Watt		R.P.M	M3/min	CFM	MmH2O	
K-DC9238-A12-33H	12	7.2-13.8	0.38	4.56	3300	2.01	71.60	7.56	0.296	43.0
K-DC9238-A12-39H			0.54	6.48	3900	2.40	85.40	10.25	0.405	48.0
K-DC9238-A12-45H			0.79	9.48	4500	2.83	99.85	14.42	0.568	53.5
K-DC9238-A12-50H			1.05	12.6	5000	3.10	109.85	16.78	0.659	56.5
K-DC9238-A24-33H	24	14.5~27.5	0.21	5.04	3300	2.01	71.60	7.56	0.296	43.0
K-DC9238-A24-39H			0.30	7.20	3900	2.40	85.40	10.25	0.405	48.0
K-DC9238-A24-45H			0.43	10.32	4500	2.83	99.85	14.42	0.568	53.5
K-DC9238-A24-50H			0.54	12.96	5000	3.10	109.85	16.78	0.659	56.5
K-DC9238-A48-33H	48	29.0~55.0	0.11	5.28	3300	2.01	71.60	7.56	0.296	43.0
K-DC9238-A48-39H			0.15	7.20	3900	2.40	85.40	10.25	0.405	48.0
K-DC9238-A48-45H			0.22	10.56	4500	2.83	99.85	14.42	0.568	53.5
K-DC9238-A60-45H	60	40~68	0.18	10.80	4500	2.83	99.85	14.42	0.568	53.5

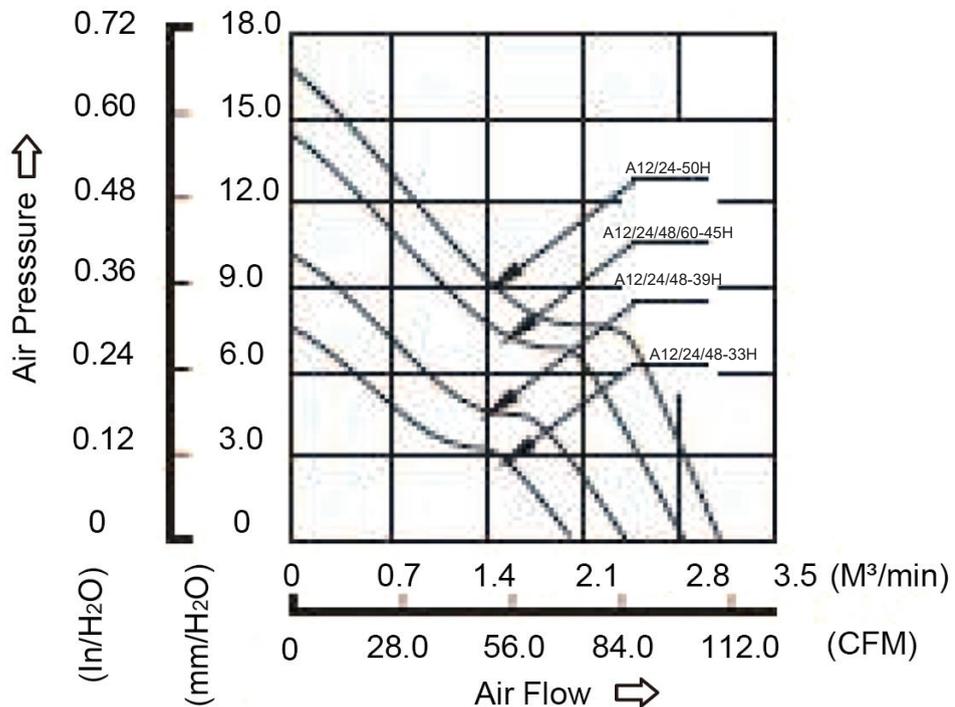


92mm-Series Fan



- Material--Frame:Plastics (Flammability:UL94V-0)
Impeller:Plastics (Flammability:UL94V-0)
- Lead Wire-- +Red -Black
Optional Function:Brown(Sensor) Yellow(Control)
- Life Time-- 25000 Hours Sleeve bearing
50000 Hours Ball bearing
- Storage Temperature-- -30°C~+70°C (Non-condensing)
- Bearing Type-- Ball Bearings~Sleeve
- Speed Range-- $\pm 10\%$

Model No.	Rated Voltage	Operating Voltage	Rated Current	Rated Input	Rated Input	Maximum Air Flow		Max.Static Pressure		Noise
	VDC	VDC	AMP	Watt	R.P.M	M³/min	CFM	MmH2O	In H2O	dB-A
K-DC9238-A12-32H	12	7.2~13.8	0.33	3.96	3200	1.933	68.26	7.76	0.305	43.5
K-DC9238-A12-38H			0.38	4.56	3800	2.287	80.77	10.88	0.428	46.2
K-DC9238-A12-44H			0.55	6.6	4400	2.668	94.22	14.67	0.578	51.7
K-DC9238-A12-48H			0.68	8.16	4800	2.936	103.67	17.56	0.691	64.0
K-DC9238-A12-60H			1.22	14.64	6000	3.662	129.31	25.78	1.015	60.5
K-DC9238-A12-70H			2.00	24.0	7000	4.347	153.52	36.79	1.449	64.0
K-DC9238-A12-80H			3.10	37.2	8000	4.957	175.03	46.21	1.819	66.5
K-DC9238-A12-90H			3.90	46.8	9000	4.957	190.11	46.21	2.142	68.5
K-DC9238-A24-32H	24	14.5~27.5	0.165	3.96	3200	1.933	68.26	7.76	0.305	43.5
K-DC9238-A24-38H			0.19	4.56	3800	2.287	80.77	10.88	0.428	46.2
K-DC9238-A24-44H			0.75	6.6	4400	2.668	94.22	14.67	0.578	51.7
K-DC9238-A24-48H			0.34	8.16	4800	2.936	103.67	17.56	0.691	64.0
K-DC9238-A24-60H			0.61	14.64	6000	3.662	129.31	25.78	1.015	60.5
K-DC9238-A24-70H			1.00	24.0	7000	4.347	153.52	36.79	1.449	64.0
K-DC9238-A24-80H			1.55	37.2	8000	4.957	175.03	46.21	1.819	66.5
K-DC9238-A24-90H			1.95	46.8	9000	4.957	190.11	46.21	2.142	68.5
K-DC9238-A48-32H	48	29~55	0.082	3.94	3200	1.933	68.26	7.76	0.305	43.5
K-DC9238-A48-38H			0.095	4.56	3800	2.287	80.77	10.88	0.428	46.2
K-DC9238-A48-44H			0.14	6.72	4400	2.668	94.22	14.67	0.578	51.7
K-DC9238-A48-48H			0.17	8.16	4800	2.936	103.67	17.56	0.691	64.0
K-DC9238-A48-60H			0.305	14.64	6000	3.662	129.31	25.78	1.015	60.5
K-DC9238-A48-70H			0.5	24.0	7000	4.347	153.52	36.79	1.449	64.0
K-DC9238-A48-80H			0.775	37.2	8000	4.957	175.03	46.21	1.819	66.5

92mm-Series Fan

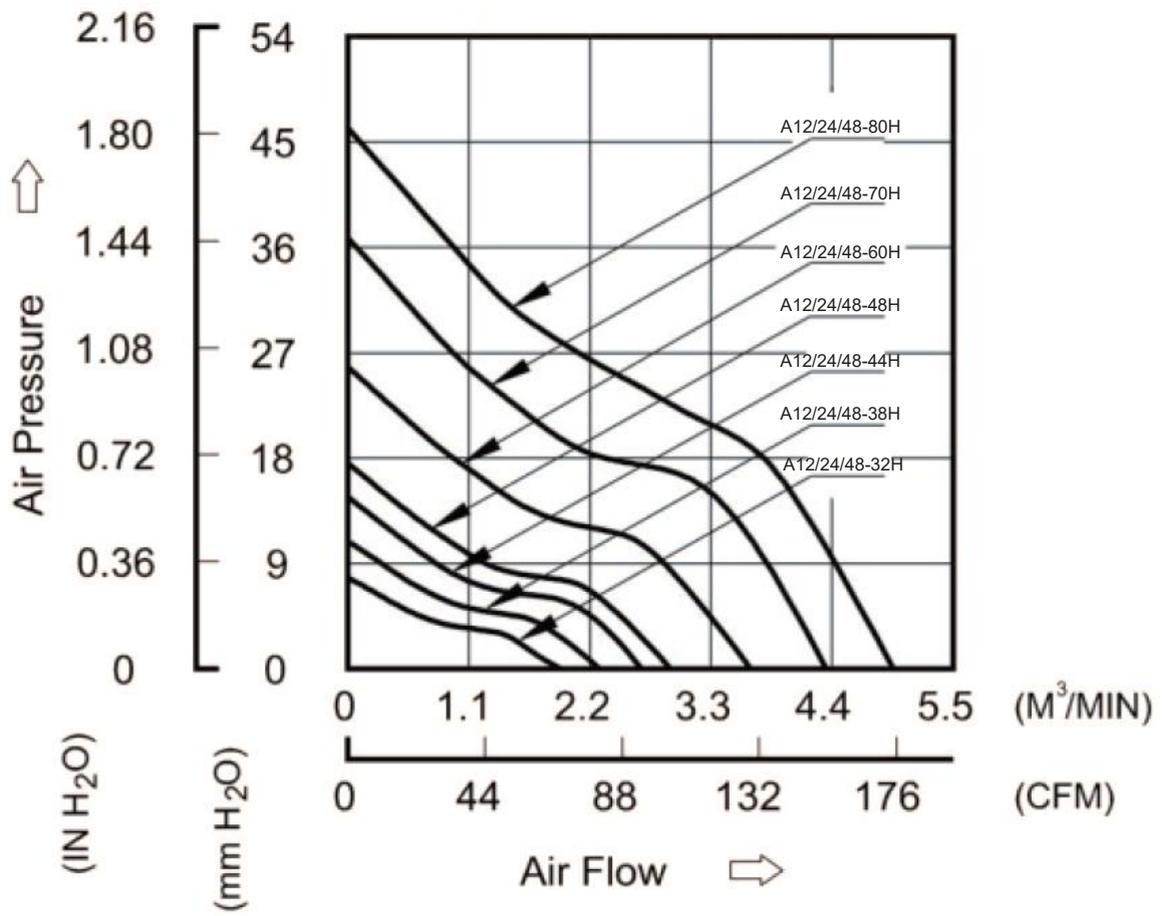

92mm-Series Fan



- Material--Frame:Plastics (Flammability:UL94V-0)
Impeller:Plastics (Flammability:UL94V-0)
- Lead Wire-- +Red -Black
Optional Function:Brown(Sensor) Yellow(Control)
- Life Time-- 25000 Hours Sleeve bearing
50000 Hours Ball bearing
- Storage Temperature-- -30°C~+70°C (Non-condensing)
- Bearing Type-- Ball Bearings~Sleeve
- Speed Range-- $\pm 10\%$

Model No.	Rated Voltage	Operating Voltage	Rated Current	Rated Input	Speed	Maximum Air Flow		Max.Static Pressure		Noise
	VDC	VDC	AMP	Watt	R.P.M	M3/min	CFM	Pa	IN H2O	dB-A
K-DC9238-A12-149H	12	7.2-13.8	5.3	63.6	14900	5.1	180	1100	4.42	72.0
K-DC9238-A24-149H	24	14.5~27.5	2.6	62.4	14900	5.1	180	1100	4.42	72.0
K-DC9238-A48-149H	48	29.0~55.0	1.2	57.6	14900	5.1	180	1100	4.42	72.0

