



## 120mm-Series Fan

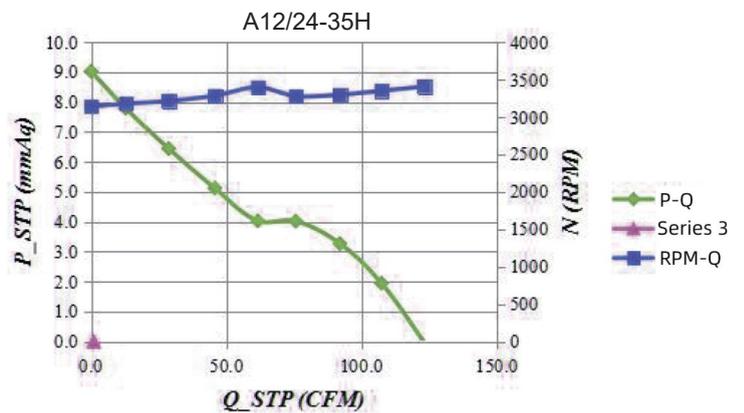

- Material--Frame:Plastics (Flammability:UL94V-0)  
Impeller:Plastics (Flammability:UL94V-0)
- Lead Wire-- +Red -Black  
Optional Function:Brown(Sensor) Yellow(Control)
- Life Time-- 25000 Hours Sleeve bearing  
50000 Hours Ball bearing
- Storage Temperature-- -30°C~+70°C (Non-condensing)
- Bearing Type-- Ball Bearings~Sleeve
- Speed Range--  $\pm 10\%$

Model No.	Rated Voltage	Operating Voltage	Rated Current	Rated Input	Speed	Maximum Air Flow		Max.Static Pressure		Noise
	VDC	VDC	AMP	Watt	R.P.M	M3/min	CFM	MmH2O	IN H2O	dB-A
K-DC12025-A12-19H	12	7.2-13.8	0.13	1.56	1900	1.9	67.1	3.91	0.11	30.0
K-DC12025-A12-22H			0.16	1.92	2200	2.25	79.4	5.14	0.15	33.5
K-DC12025-A12-25H			0.24	2.88	2500	2.58	91.1	6.21	0.19	37.0
K-DC12025-A12-31H			0.4	4.8	3100	2.96	104.2	7.65	0.301	42.5
K-DC12025-A12-35H			0.5	6.0	3500	3.19	126.7	10.86	0.425	47.0
K-DC12025-A24-19H	24	14.5~27.5	0.065	1.56	1900	1.9	67.1	3.91	0.11	30.0
K-DC12025-A24-22H			0.08	1.92	2200	2.25	79.4	5.14	0.15	33.5
K-DC12025-A24-25H			0.12	2.88	2500	2.58	91.1	6.21	0.19	37.0
K-DC12025-A24-31H			0.2	4.8	3100	2.96	104.2	7.65	0.301	42.5
K-DC12025-A24-35H			0.25	6.0	3500	3.19	126.7	10.86	0.425	47.0

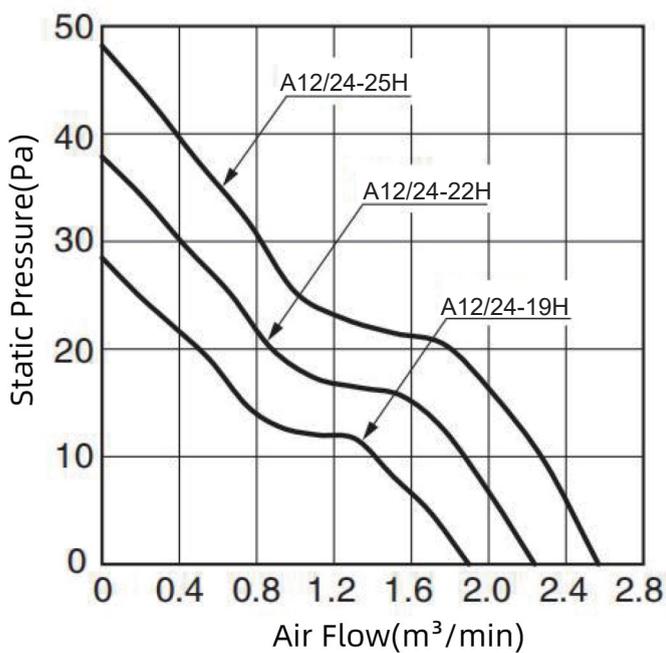

# 120mm-Series Fan



- Material--Frame:Plastics (Flammability:UL94V-0)  
Impeller:Plastics (Flammability:UL94V-0)
- Lead Wire-- +Red -Black  
Optional Function:Brown(Sensor) Yellow(Control)
- Life Time-- 25000 Hours Sleeve bearing  
50000 Hours Ball bearing
- Storage Temperature-- -30°C~+70°C (Non-condensing)
- Bearing Type-- Ball Bearings~Sleeve
- Speed Range--  $\pm 10\%$

Model No.	Rated Voltage	Operating Voltage	Rated Current	Rated Input	Speed	Maximum Air Flow		Max.Static Pressure		Noise
	VDC	VDC	AMP	Watt		R.P.M	M3/min	CFM	MmH2O	
K-DC12025-A12-83H	12	7.2-13.8	2.0	24.0	8300	4.94	174.53	54.33	2.13	65.5
K-DC12025-A24-83H	24	14.5~27.5	1.0	24.0	8300	4.94	174.53	54.33	2.13	65.5
K-DC12025-A48-83H	48	36.5~55.5	0.5	24.0	8300	4.94	174.53	54.33	2.13	65.5

